

# COMPACT LED EVO P

LOUVRES

LED GO!



220-240 V | LED |  |  | IP20 | IP44 | IP54 | IK07 | 

## TECHNICAL PARAMETERS

Ingress protection:	IP44/IP20; IP54/IP20
Impact resistance:	IK07
Nominal power [W]:	24.00 - 60.00
Luminous flux [lm]*:	2750 - 8100
Colour temperature [K]:	3000; 4000
Colour rendering index:	>80
SDCM:	≤ 3
Energy efficiency class:	A+; A++
Material of the body:	ABS
Colour of the body:	white
Diffuser material:	PC
Diffuser type:	OPAL; PRM
Mounting version:	recessed
Dimensions [mm]:	595/595/66

\*Tolerance +/- 10%

## CHARACTERISTICS

Compact LED luminaire designed for installation in modular ceilings or surface mounting. Equipped with energy-saving LED GO! panels and an evenly highlighted opal diffuser, providing low glare. Made of plastic. Assembly or electrical connection does not require removing the diffuser.

## APPLICATION

This luminaire is designed for indoor use in offices or general utility rooms. It can be used as the main light source and it is particularly well-suited to be used as a light source for workplaces that require eyesight focus. The luminaire is used both in new applications, as well as it can replace traditional fluorescent luminaires with energy-saving LED solutions. The fitting's design is suitable for mounting in 600x600 modular ceilings.

# COMPACT LED EVO P

LOUVRES

LED GO!

## AVAILABLE TYPES

[Click >> index, to see details](#)

## COMPACT LED EVO P IP44/IP20

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	DIMM DALI	Emergency lighting [h]	Energy efficiency class	Electrical protection class	Index
24	3000	2750	OPAL				A+	II	<a href="#">&gt;&gt; 628450</a>
24	4000	2950	OPAL				A+	II	<a href="#">&gt;&gt; 628443</a>
24	3000	3300	PRM				A+	II	<a href="#">&gt;&gt; 628474</a>
24	4000	3550	PRM				A++	II	<a href="#">&gt;&gt; 628467</a>
24	3000	2750	OPAL			3	A+	II	<a href="#">&gt;&gt; 629051</a>
24	4000	2950	OPAL			3	A+	II	<a href="#">&gt;&gt; 629044</a>
24	3000	3300	PRM			3	A+	II	<a href="#">&gt;&gt; 629075</a>
24	4000	3550	PRM			3	A++	II	<a href="#">&gt;&gt; 629068</a>
24	3000	2750	OPAL	yes			A+	II	<a href="#">&gt;&gt; 629259</a>
24	4000	2950	OPAL	yes			A+	II	<a href="#">&gt;&gt; 629242</a>
24	3000	3300	PRM	yes			A+	II	<a href="#">&gt;&gt; 629273</a>
24	4000	3550	PRM	yes			A++	II	<a href="#">&gt;&gt; 629266</a>
32	3000	3550	OPAL				A+	II	<a href="#">&gt;&gt; 628412</a>
32	4000	3800	OPAL				A+	II	<a href="#">&gt;&gt; 628405</a>
32	3000	4250	PRM				A+	II	<a href="#">&gt;&gt; 628436</a>
32	4000	4550	PRM				A++	II	<a href="#">&gt;&gt; 628429</a>
32	3000	3550	OPAL			3	A+	II	<a href="#">&gt;&gt; 629013</a>
32	4000	3800	OPAL			3	A+	II	<a href="#">&gt;&gt; 629006</a>
32	3000	4250	PRM			3	A+	II	<a href="#">&gt;&gt; 629037</a>
32	4000	4550	PRM			3	A++	II	<a href="#">&gt;&gt; 629020</a>
32	3000	3550	OPAL	yes			A+	II	<a href="#">&gt;&gt; 629211</a>
32	4000	3800	OPAL	yes			A+	II	<a href="#">&gt;&gt; 629204</a>
32	3000	4250	PRM	yes			A+	II	<a href="#">&gt;&gt; 629235</a>
32	4000	4550	PRM	yes			A++	II	<a href="#">&gt;&gt; 629228</a>
42	3000	4450	OPAL				A+	II	<a href="#">&gt;&gt; 628498</a>
42	4000	4800	OPAL				A+	II	<a href="#">&gt;&gt; 628481</a>
42	3000	5350	PRM				A+	II	<a href="#">&gt;&gt; 628511</a>
42	3000	4450	OPAL			3	A+	II	<a href="#">&gt;&gt; 629099</a>
42	4000	4800	OPAL			3	A+	II	<a href="#">&gt;&gt; 629082</a>
42	3000	5350	PRM			3	A+	II	<a href="#">&gt;&gt; 629112</a>
42	4000	5750	PRM			3	A++	II	<a href="#">&gt;&gt; 629105</a>
42	4000	5750	PRM				A++	II	<a href="#">&gt;&gt; 628504</a>
42	3000	4450	OPAL		yes		A+	I	<a href="#">&gt;&gt; 629570</a>
42	4000	4800	OPAL		yes		A+	I	<a href="#">&gt;&gt; 629563</a>
42	3000	5350	PRM		yes		A+	I	<a href="#">&gt;&gt; 629594</a>
42	4000	5750	PRM		yes		A++	I	<a href="#">&gt;&gt; 629587</a>
42	3000	4450	OPAL	yes			A+	II	<a href="#">&gt;&gt; 629297</a>
42	4000	4800	OPAL	yes			A+	II	<a href="#">&gt;&gt; 629280</a>
42	3000	5350	PRM	yes			A+	II	<a href="#">&gt;&gt; 629310</a>
42	4000	5750	PRM	yes			A++	II	<a href="#">&gt;&gt; 629303</a>
52	3000	5050	OPAL				A+	II	<a href="#">&gt;&gt; 628535</a>
52	4000	5450	OPAL				A+	II	<a href="#">&gt;&gt; 628528</a>
52	3000	6100	PRM				A+	II	<a href="#">&gt;&gt; 628559</a>
52	4000	6550	PRM				A+	II	<a href="#">&gt;&gt; 628542</a>
52	3000	5050	OPAL			3	A+	II	<a href="#">&gt;&gt; 629136</a>
52	4000	5450	OPAL			3	A+	II	<a href="#">&gt;&gt; 629129</a>
52	3000	6100	PRM			3	A+	II	<a href="#">&gt;&gt; 629150</a>
52	4000	6550	PRM			3	A+	II	<a href="#">&gt;&gt; 629143</a>

# COMPACT LED EVO P

## LOUVRES

LED GO!

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	DIMM DALI	Emergency lighting [h]	Energy efficiency class	Electrical protection class	Index
52	3000	5050	OPAL	yes			A+	II	<a href="#">&gt;&gt; 629334</a>
52	4000	5450	OPAL	yes			A+	II	<a href="#">&gt;&gt; 629327</a>
52	3000	6100	PRM	yes			A+	II	<a href="#">&gt;&gt; 629358</a>
52	4000	6550	PRM	yes			A+	II	<a href="#">&gt;&gt; 629341</a>
60	3000	6300	OPAL		yes		A+	I	<a href="#">&gt;&gt; 629617</a>
60	4000	6750	OPAL		yes		A+	I	<a href="#">&gt;&gt; 629600</a>
60	3000	6300	OPAL				A+	I	<a href="#">&gt;&gt; 628573</a>
60	4000	6750	OPAL				A+	I	<a href="#">&gt;&gt; 628566</a>
60	3000	7550	PRM				A+	I	<a href="#">&gt;&gt; 628597</a>
60	4000	8100	PRM				A+	I	<a href="#">&gt;&gt; 628580</a>
60	3000	6300	OPAL			3	A+	I	<a href="#">&gt;&gt; 629174</a>
60	4000	6750	OPAL			3	A+	I	<a href="#">&gt;&gt; 629167</a>
60	3000	7550	PRM		yes		A+	I	<a href="#">&gt;&gt; 629631</a>
60	4000	8100	PRM		yes		A+	I	<a href="#">&gt;&gt; 629624</a>
60	3000	7550	PRM			3	A+	I	<a href="#">&gt;&gt; 629198</a>
60	4000	8100	PRM			3	A+	I	<a href="#">&gt;&gt; 629181</a>
60	3000	6300	OPAL	yes			A+	I	<a href="#">&gt;&gt; 629372</a>
60	4000	6750	OPAL	yes			A+	I	<a href="#">&gt;&gt; 629365</a>
60	3000	7550	PRM	yes			A+	I	<a href="#">&gt;&gt; 629396</a>
60	4000	8100	PRM	yes			A+	I	<a href="#">&gt;&gt; 629389</a>

## COMPACT LED EVO P IP54/IP20

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	DIMM DALI	Emergency lighting [h]	Energy efficiency class	Electrical protection class	Index
24	3000	3300	PRM				A++	II	<a href="#">&gt;&gt; 630873</a>
24	4000	2950	OPAL				A+	II	<a href="#">&gt;&gt; 630842</a>
24	4000	3550	PRM				A++	II	<a href="#">&gt;&gt; 630866</a>
24	3000	2750	OPAL				A+	II	<a href="#">&gt;&gt; 630859</a>
32	3000	3550	OPAL				A+	II	<a href="#">&gt;&gt; 630811</a>
32	3000	4250	PRM				A+	II	<a href="#">&gt;&gt; 630835</a>
32	4000	3800	OPAL				A+	II	<a href="#">&gt;&gt; 630804</a>
32	4000	4550	PRM				A++	II	<a href="#">&gt;&gt; 630828</a>
42	3000	4450	OPAL				A+	II	<a href="#">&gt;&gt; 630897</a>
42	3000	5350	PRM				A+	II	<a href="#">&gt;&gt; 630910</a>
42	4000	4800	OPAL				A+	II	<a href="#">&gt;&gt; 630880</a>
42	4000	5750	PRM				A++	II	<a href="#">&gt;&gt; 630903</a>
52	3000	5050	OPAL				A+	II	<a href="#">&gt;&gt; 630996</a>
52	3000	6100	PRM				A+	II	<a href="#">&gt;&gt; 630972</a>
52	4000	5450	OPAL				A+	II	<a href="#">&gt;&gt; 630989</a>
52	4000	6550	PRM				A+	II	<a href="#">&gt;&gt; 630965</a>
60	3000	6300	OPAL				A+	II	<a href="#">&gt;&gt; 630958</a>
60	3000	7550	PRM				A+	II	<a href="#">&gt;&gt; 630934</a>
60	4000	6750	OPAL				A+	II	<a href="#">&gt;&gt; 630941</a>
60	4000	8100	PRM				A+	II	<a href="#">&gt;&gt; 630927</a>

\*Tolerance +/- 10%

# COMPACT LED EVO P

LOUVRES

LED GO!

## ACCESSORIES

Name	Index
COMPACT LED EVO Zaczep do sufitów KG (4 szt.) / Plasterboard mounting brackets (4 pcs)	630033
COMPACT LED EVO Zabezpieczenie montażowe (sufit modułowy) / Safety suspension (modular ceiling)	904349




COMPACT LED EVO Zaczep do sufitów KG (4 szt.) / Plasterboard mounting brackets (4 pcs) (630033)




COMPACT LED EVO Zabezpieczenie montażowe (sufit modułowy) / Safety suspension (modular ceiling) (904349)

## LUMINOUS INTENSITY DISTRIB. CURVE

COMPACT LED EVO N OPAL

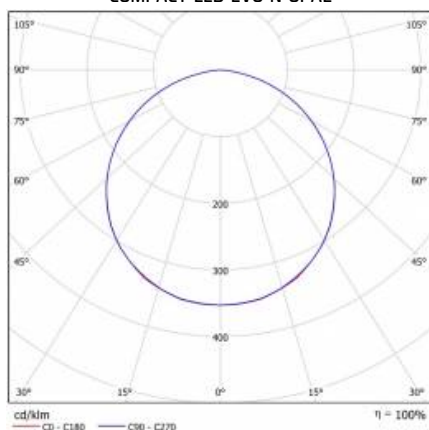

COMPACT LED EVO N PRM

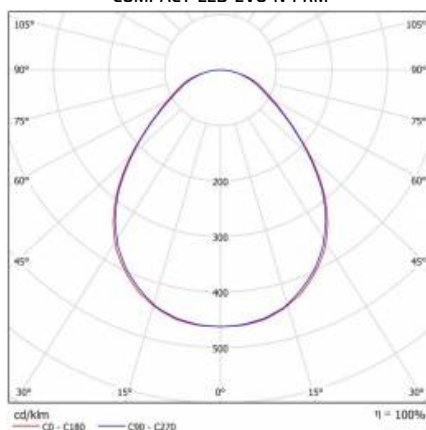

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer.

Revision date: 2018-06-22



Lena Lighting S.A.  
ul. Kórnicka 52  
63-000 Środa Wielkopolska

tel. +48 61 28 60 300  
e-mail: office@lenalighting.pl  
www.lenalighting.pl



The luminaire complies with the EU RoHS Directive 2011/65/UE



This product is a subject to electric and electronic waste equipment regulations (WEEE).



01/2018; 45/2018