

# MIRRA LED

## BATTENS

LED GO!



220-240 V | LED |  IP44

### TECHNICAL PARAMETERS

Ingress protection:	IP44
Nominal power [W]:	15.00; 20.00
Luminous flux [lm]*:	1200; 1600
Colour temperature [K]:	4000
Colour rendering index:	>80
Electrical protection class:	II
Energy efficiency class:	A
Diffuser type:	OPAL
Mounting version:	surface, wall mounted
Dimensions [mm]:	52/69/600; 52/69/900

\*Tolerance +/- 10%

### CHARACTERISTICS

Versatile LED luminaire intended for indoor use in rooms with increased humidity. It is widely used in office and commercial facilities, in particular, bathrooms and toilets. Body made of PC. White and grey end caps included.

### APPLICATION

The luminaire is suitable for rooms that require increased ingress protection (IP44) such as toilets and bathrooms in public facilities; schools, public offices; shopping malls, office buildings and industrial buildings.

# MIRRA LED

## BATTENS

LED GO!

### AVAILABLE TYPES

[Click >> index, to see details](#)

#### MIRRA LED 52/69/600mm


Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Energy efficiency class	Index
15	4000	1200	OPAL	A	<a href="#">&gt;&gt; 703164</a>

#### MIRRA LED 52/69/900mm

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Energy efficiency class	Index
20	4000	1600	OPAL	A	<a href="#">&gt;&gt; 703171</a>

\*Tolerance +/- 10%

### LUMINOUS INTENSITY DISTRIB. CURVE

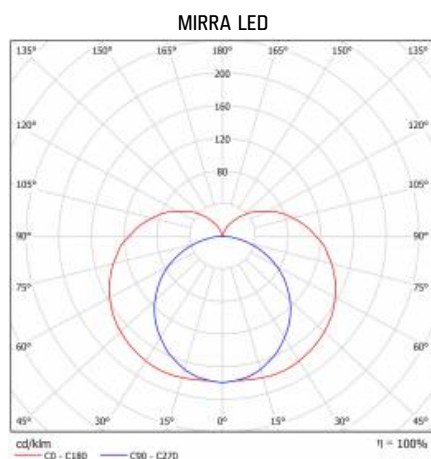

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer.

Revision date: 2018-06-07



Lena Lighting S.A.  
ul. Kórnicka 52  
63-000 Środa Wielkopolska

tel. +48 61 28 60 300  
e-mail: office@lenalighting.pl  
www.lenalighting.pl



The luminaire complies with the EU RoHS Directive 2011/65/UE



This product is a subject to electric and electronic waste equipment regulations (WEEE).



35/2018