

TABLO LED

BATTENS



220-240 V | LED | IP20
50-60 Hz

TECHNICAL PARAMETERS

Ingress protection:	IP20
Nominal power [W]:	35.00; 70.00
Luminous flux [lm]*:	4300 - 9300
Colour temperature [K]:	3000; 4000
Colour rendering index:	>80
SDCM:	≤ 3
Energy efficiency class:	A+
Optics:	lens
Mounting version:	recessed; surface

*Tolerance +/- 10%

CHARACTERISTICS

The surface or recessed mounted fixture equipped with energy saving LED GO panels and a lens generating asymmetric light distribution. It was made of powder coated white RAL 9003 steel sheet. Shade – a PMMA iridescent lens of 85% light transmission assures high efficiency of the fixture. Available in two power options: 35W with a single LED GO! Panel and 70W with a double LED GO! panel. Colour temperature: 3000K or 4000K. Fixture's colour rendering index is: CRI>80 and standard deviation colour matching (SDCM): ≤ 3, assuring homogeneity and uniformity of light.

APPLICATION

The fixture is equipped with linear lenses assuring asymmetric distribution with a beam angle of 20° that is perfect for illumination of boards, paintings and display cases. An iridescent lampshade disperses light assuring that objects are uniformly illuminated with no light reflex. The fixture is applied mostly in schools, universities, museums and art galleries.

TABLO LED

BATTENS

AVAILABLE TYPES

[Click >> index, to see details](#)

TABLO LED surface


Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Energy efficiency class	Index
35	3000	4300	A+	>> 514869
35	4000	4650	A+	>> 514876
70	3000	8650	A+	>> 514821
70	4000	9300	A+	>> 514838

TABLO LED recessed

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Energy efficiency class	Index
35	3000	4300	A+	>> 514883
35	4000	4650	A+	>> 514890
70	3000	8650	A+	>> 514845
70	4000	9300	A+	>> 514852

*Tolerance +/- 10%

LUMINOUS INTENSITY DISTRIB. CURVE

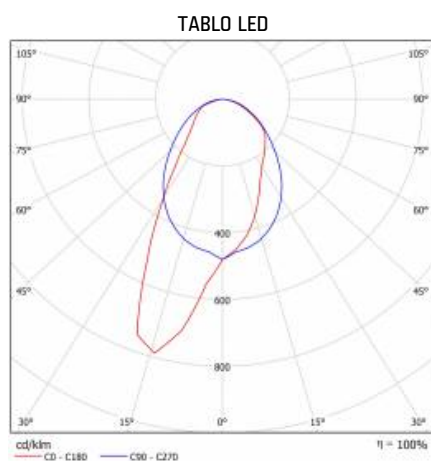

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer.

Revision date: 2018-03-28



Lena Lighting S.A.
ul. Kórnicka 52
63-000 Środa Wielkopolska

tel. +48 61 28 60 300
e-mail: office@lenalighting.pl
www.lenalighting.pl



The luminaire complies with the EU RoHS Directive 2011/65/UE



This product is a subject to electric and electronic waste equipment regulations (WEEE).



44/2018; 47/2018