

# HULK LED

HIGH-BAY AND LOW-BAY

LED GO!



220-240 V | LED |  IP65 | IK08 |  CE

## TECHNICAL PARAMETERS

Ingress protection:	IP65
Nominal power [W]:	150.00; 200.00
Luminous flux [lm]*:	18500 - 25150
Colour temperature [K]:	5000
Colour rendering index:	>80
Electrical protection class:	II
Energy efficiency class:	A+
Material of the body:	aluminium
Diffuser type:	MAT
Mounting version:	suspended

\*Tolerance +/- 10%

## CHARACTERISTICS

HIGH-BAY type LED fitting, in which high-power LED modules with an opal diffuser were used. Made of powder coated aluminum, in RAL9006 colour. As a standard, it is equipped with power supply with a DIMM 1-10V dimmer. Distribution angle: 120°. Colour temperature 5000K, CRI>80, lifespan of LED 50 000h (L70B50) ta= 25 °C.

## APPLICATION

The fitting is designed for suspended installation, both for outside and internal use. Perfect for manufacturing plants and halls, as well as large-format warehouses.

# HULK LED

HIGH-BAY AND LOW-BAY

LED GO!

## AVAILABLE TYPES


[Click >> index, to see details](#)

Nominal power [W]	Colour temperature [K]	Diffuser type	Energy efficiency class	Index BBBBBBB
150	5000	MAT	A+	<a href="#">&gt;&gt; 374128</a>
200	5000	MAT	A+	<a href="#">&gt;&gt; 374135</a>

\*Tolerance +/- 10%

## LUMINOUS INTENSITY DISTRIB. CURVE

HULK LED 150W IP65 5000K

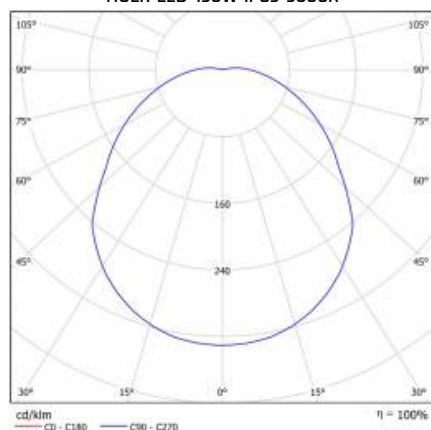

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer.

Revision date: 2018-06-07



Lena Lighting S.A.  
ul. Kórnicka 52  
63-000 Środa Wielkopolska

tel. +48 61 28 60 300  
e-mail: office@lenalighting.pl  
www.lenalighting.pl



The luminaire complies with the EU RoHS Directive 2011/65/UE



This product is a subject to electric and electronic waste equipment regulations (WEEE).



15/2017